

Replacement

Drawing 4/30/08


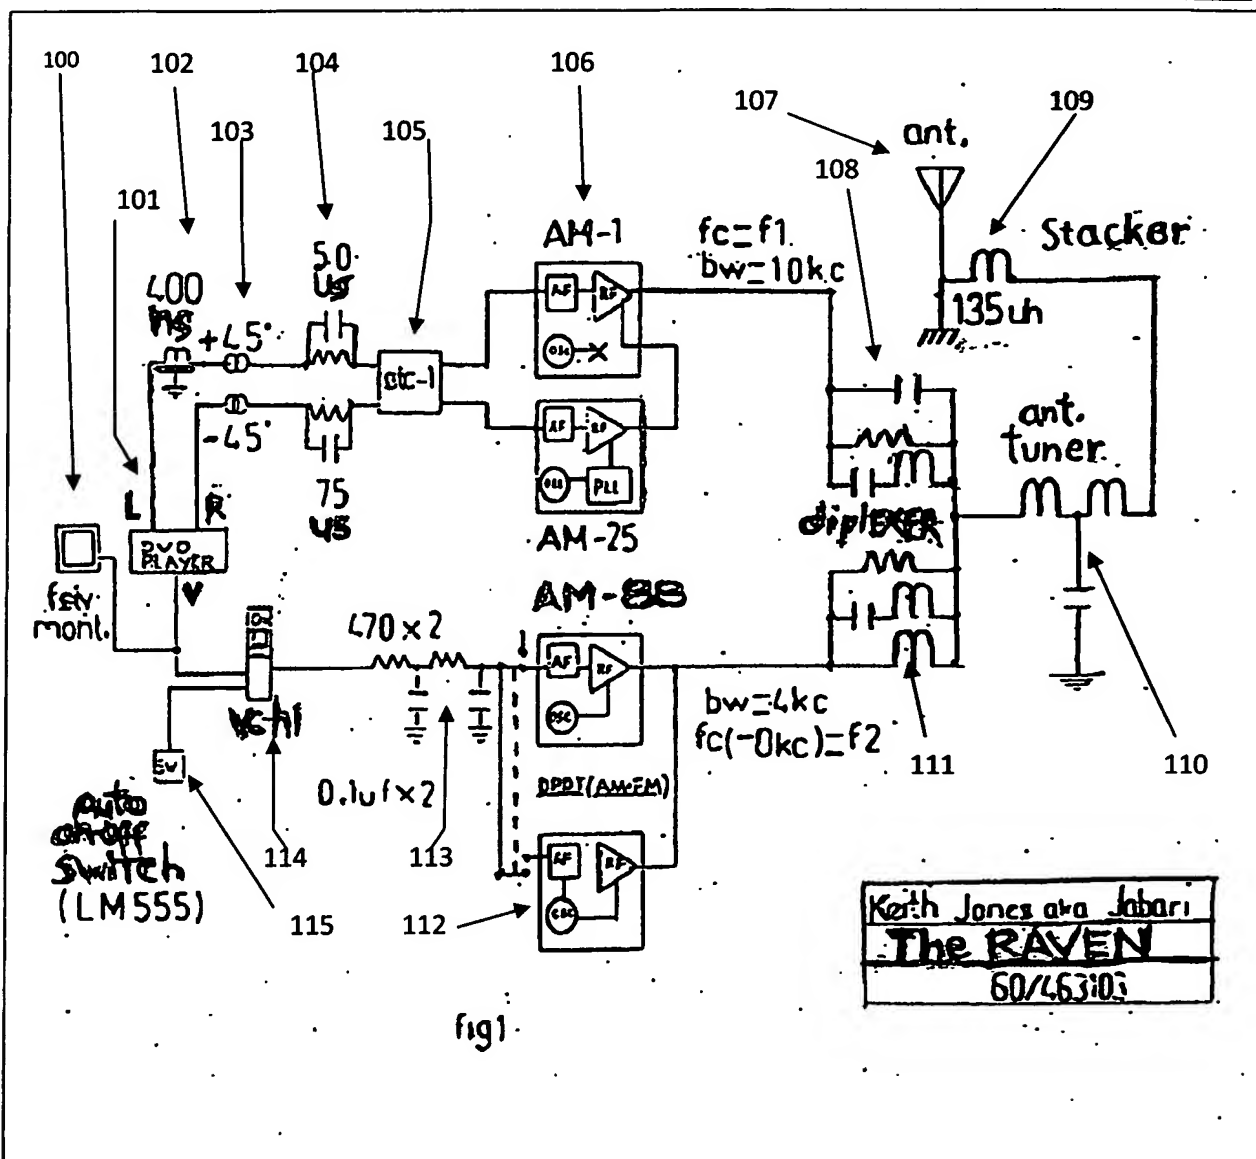


Fig 1

100. Color TV monitor. 101. DVD player. 102. Delay line 400nano second to left channel. 103. Left and right channel 45 degree out of phase networks. 104. Optional pre-emphasis. 105. Stereo limiter. 106. AM stereo transmitter. 107. Antenna. 108 and 111 RF signal combiner called a diplexer. 109. Stacker increases the electrical leant of the antenna. 110. Antenna Tuner. 112. Video transmitter. 113. De-emphasis input. 114. Slow Scan TV converter. 115. Auto switch to SSTV converter.

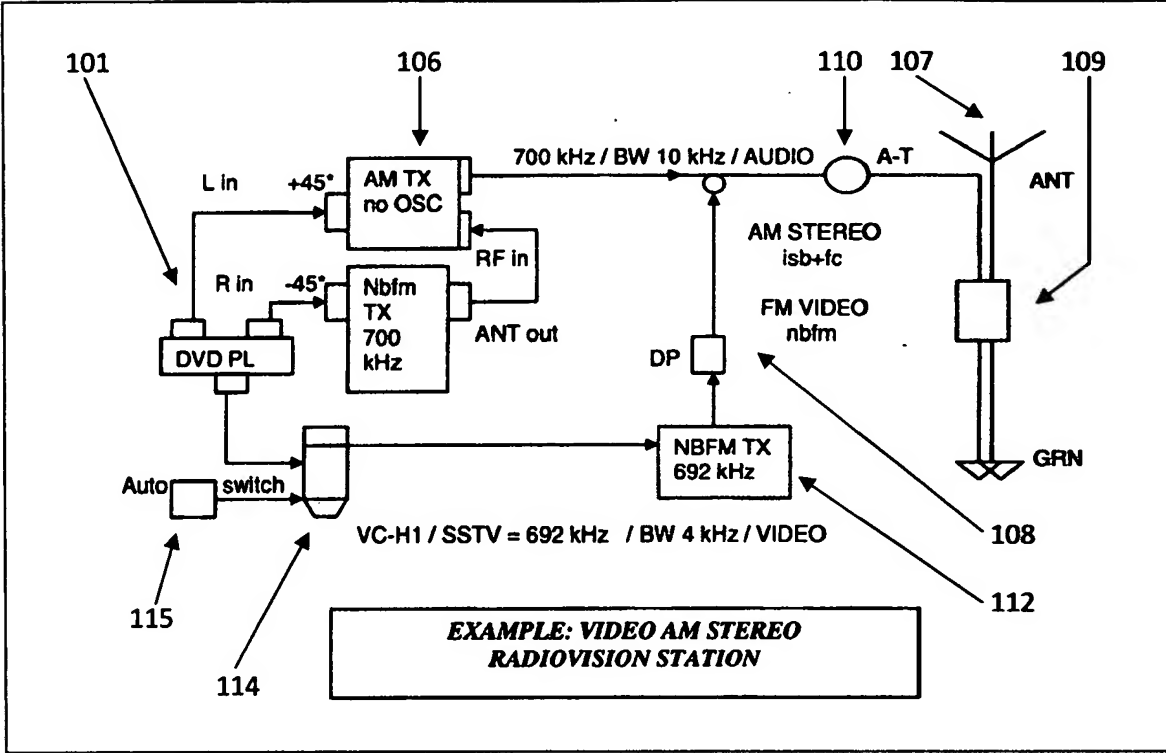



**FIG 2**

**101. DVD Player. 106. AM Stereo Transmitter. 107. Antenna. 108. Diplexer. 109. Stacker.**

**110. Antenna tuner. 112. Video transmitter. 114. SSTV converter. 115. SSTV auto switch.**

Replacement

Drawing 4/30/08

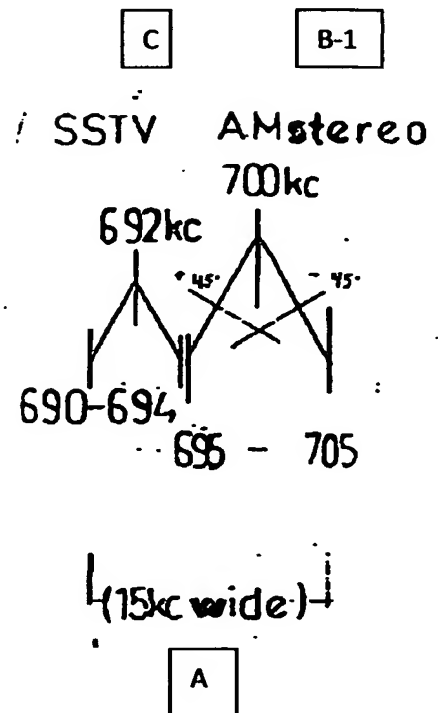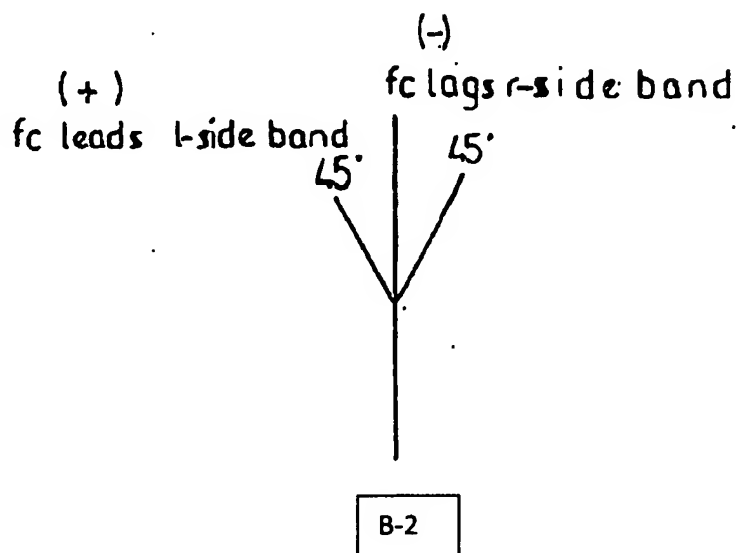

A. The channel bandwidth of an AM radio station at 700 KHz. B-1. The audio portion of this station.

B. -2. The AM stereo vectors of B-1. C. The video portion of the AM radio station at 700 kHz

FIG 3

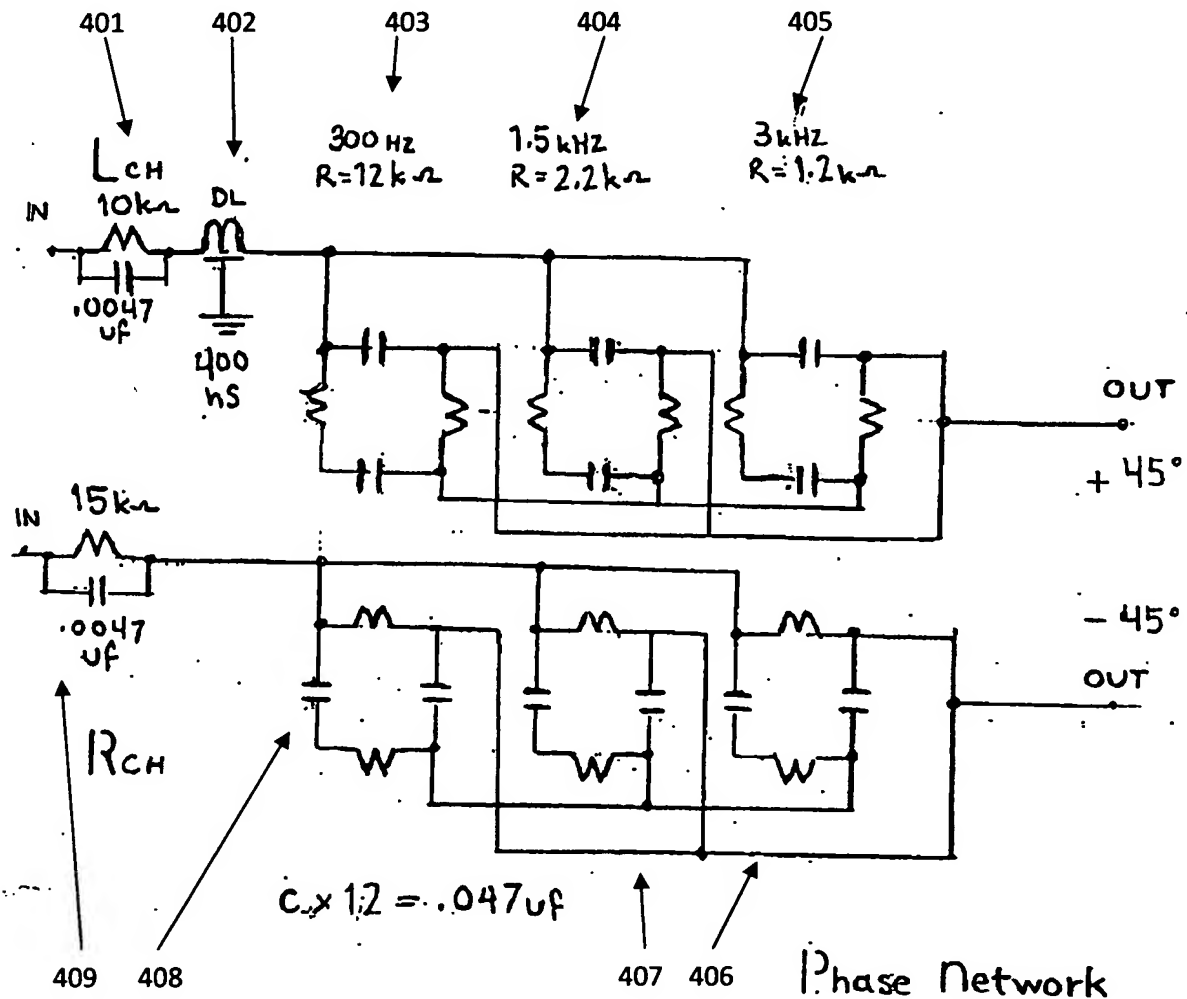


FIG 4

401 and 409 = the optional per-emphasis input networks. 402 = Delay line. 403 and 408 = 300 Hz audio section.


404 and 407 = the 1.5 kHz audio section. 405 and 406 = the 3 kHz audio section.

C =  $\text{---} \parallel \text{---}$  12 CAPASITORS with a value of .047 microfarads.

R =  $\text{---} \text{ww} \text{---}$  4 RESISTORS at 12 kilo ohms (12, 0000) for the 403-408 section.

4 RESISTORS at 2.2 k ohms for the 404-407 section

4 RESISTORS at 1.2 k ohms for the 405-406 section

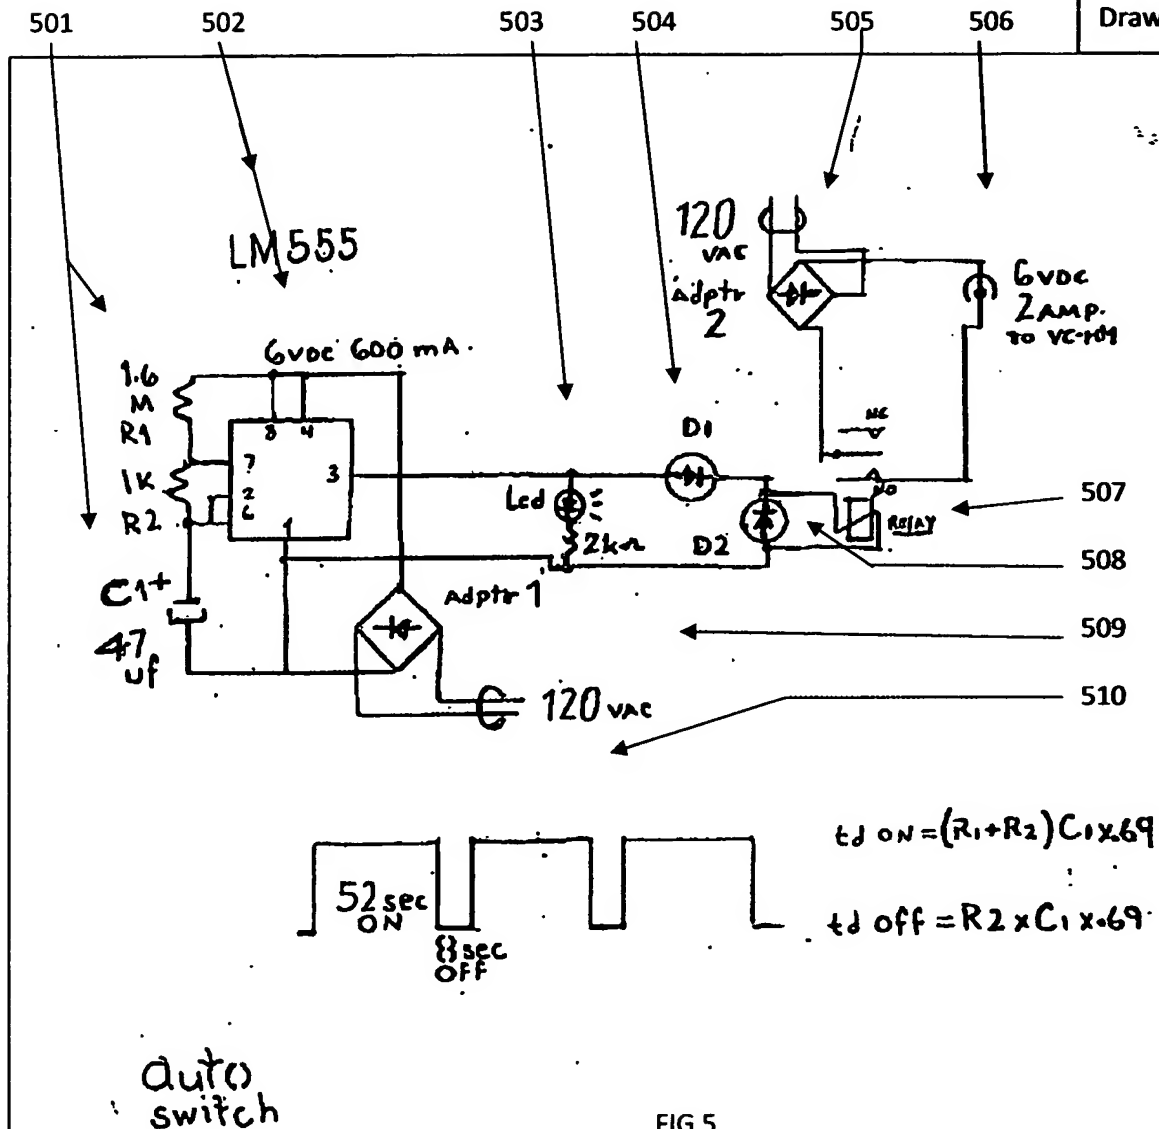

501= RC on/off timing circuit

502= IC (LM 555 timer)

503=Power on (red LED), 117 to 120 volt s AC

504=6 volts/2amps on (green LED)


505and 509= AC to DC voltage adaptors

506=6 volt 2 amp output

507= 10 volt DC relay

508 relay damper diode

510=6volts/2 amps pulse DC, 52 seconds ON,  
8 second OFF at output 506

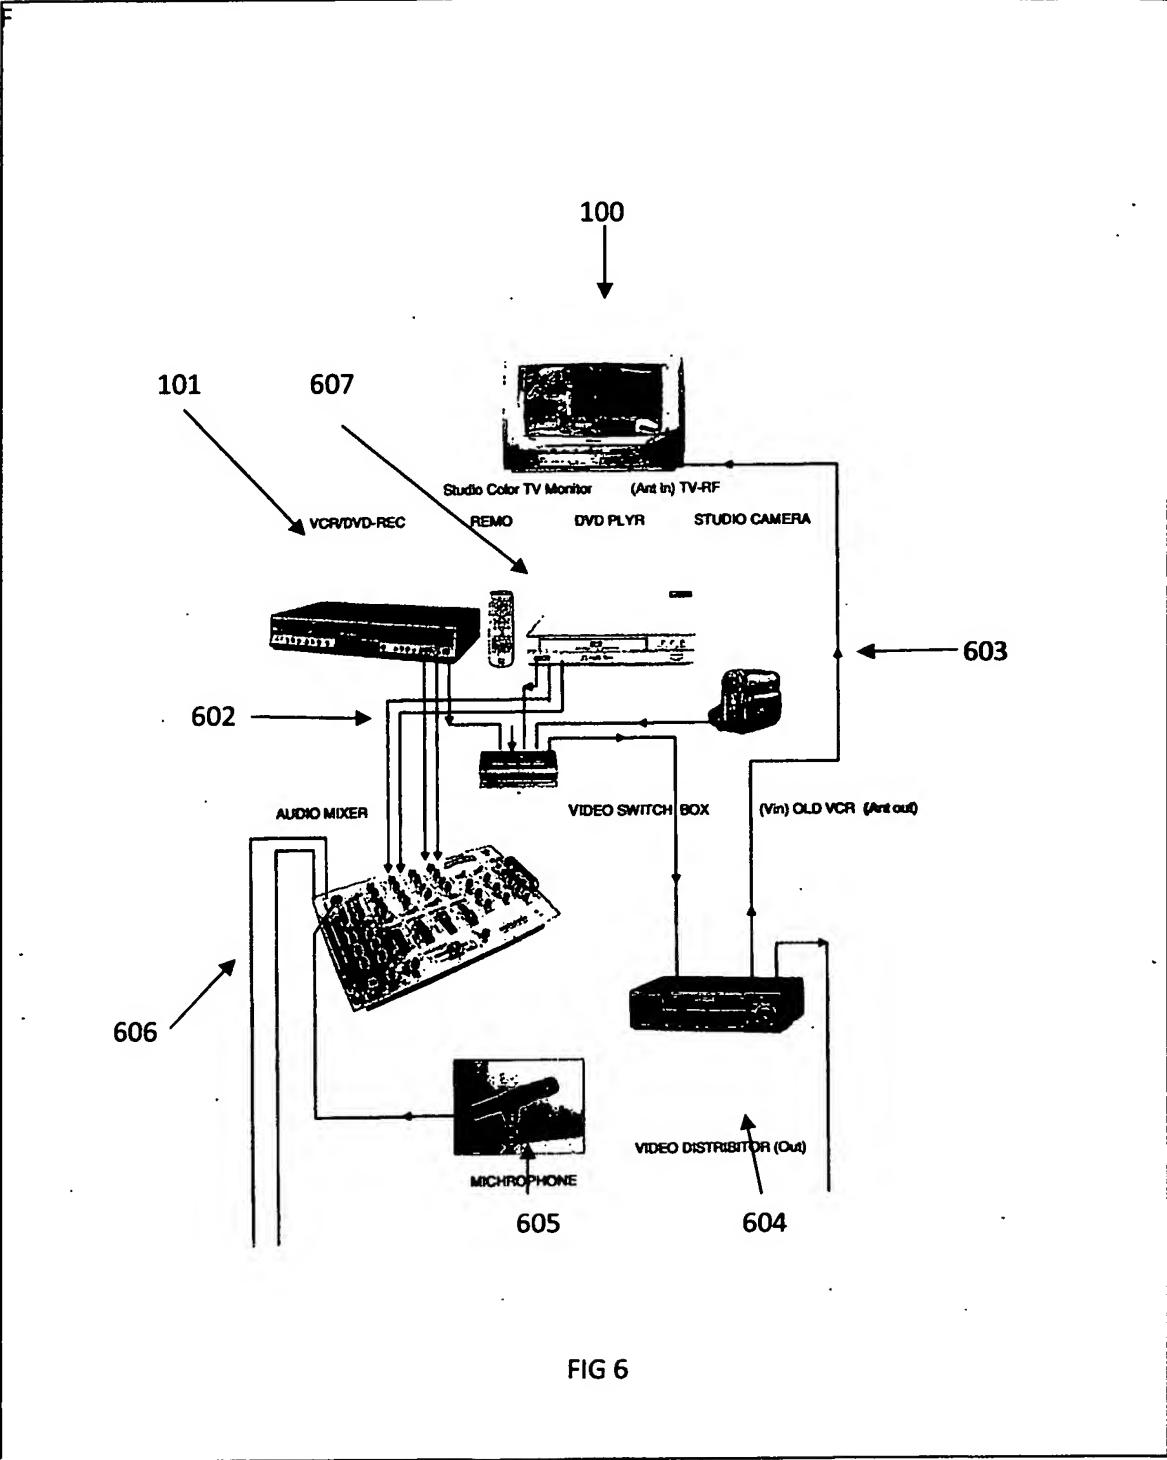

100=Color TV monitor. 101and 607= DVD Players. 602= Video switch box. 603= in studio color video camera. 604= video distributor (VCR).605 audio microphone. 606. Audio control console


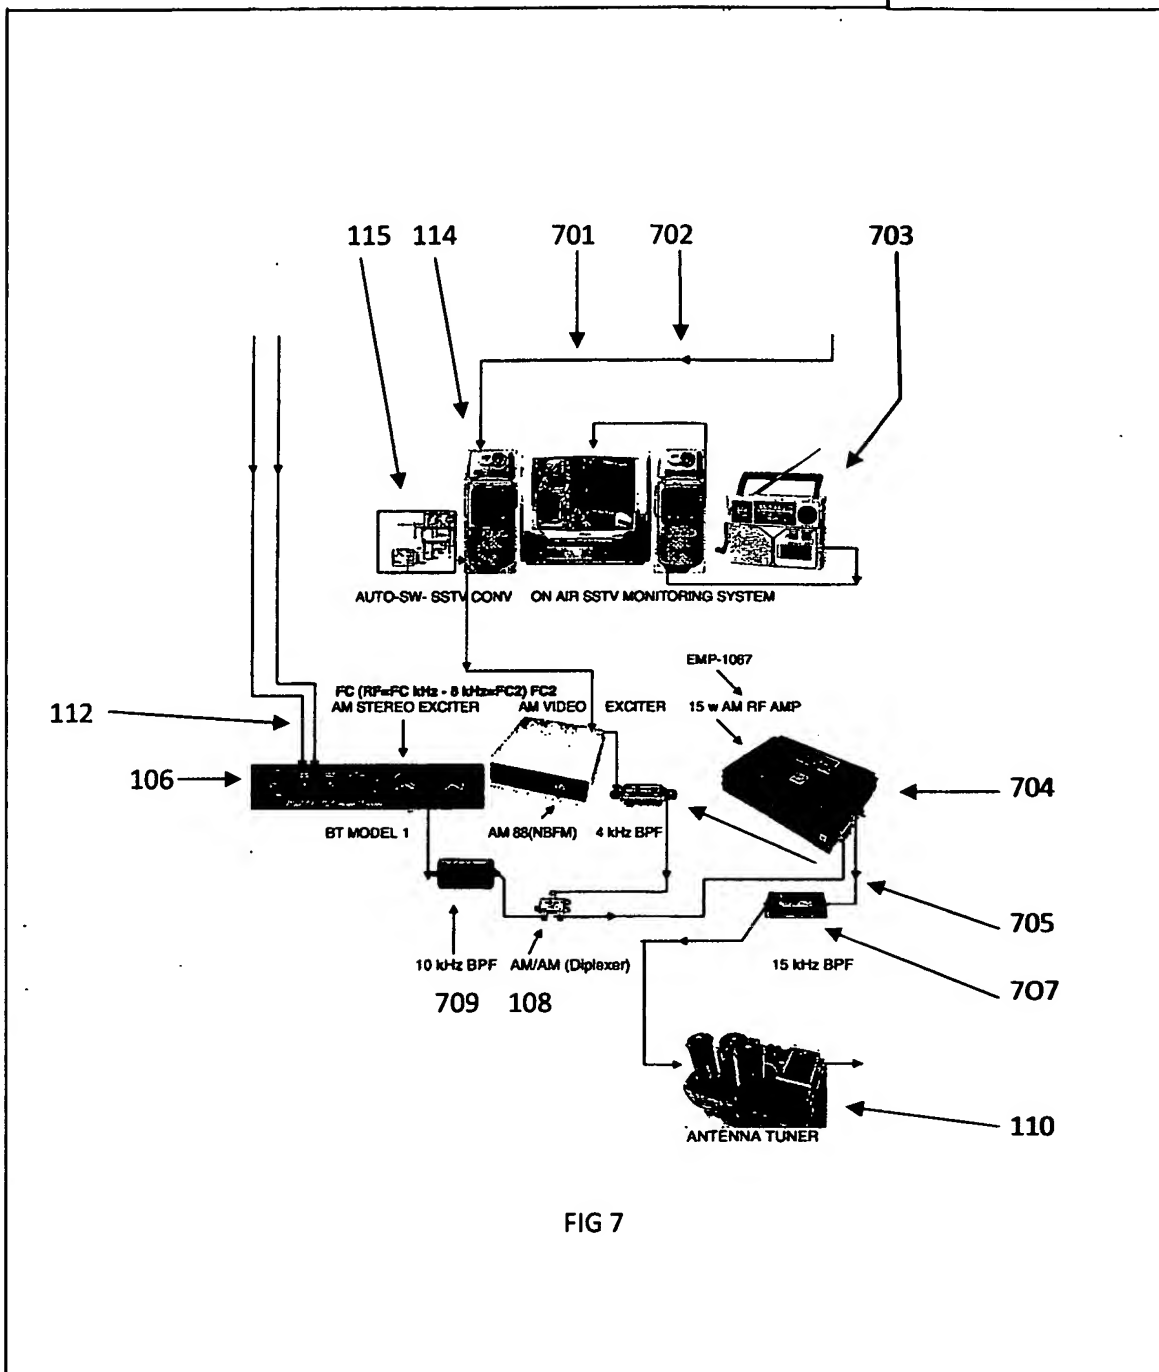


FIG 7


106. AM Stereo exciter. 108. Diplexer. 110. Antenna tuner. 112 Video exciter. 114. SSTV Converter-TX.  
115. SSTV auto switch. 701. On air color video monitor. 702. SSTV Converter-RX.  
703. Standard radio receiver. 704. RF amp (AM transmitter). 705-707-709, Bandwidth filters.

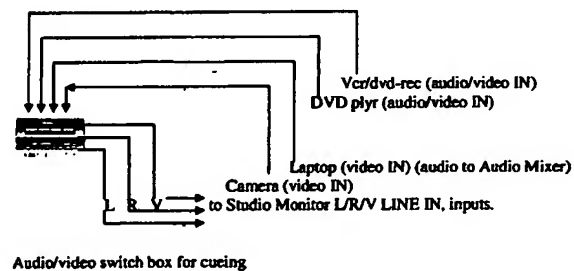

The LAPTOP can store and playback thousands of songs and videos, as well as searching iTUNES and the internet for new songs and videos, for storage and playback. It replaces all DVD PLAYERS and VCR PLAYERS at the station, except the two on standby. Other feathers include on line iChAT AV (such as a VIDEO CONFERENCE CALL from multiple LISTENERS-VIEWERS-CALLERS and TEXTERS!!!).

FIG 8



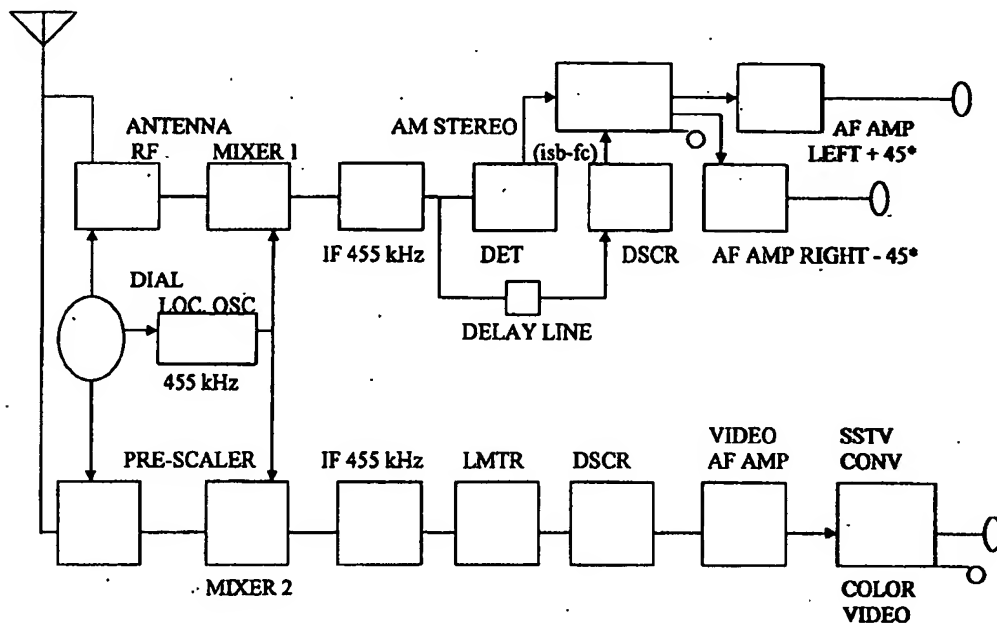

RF = 530 kHz to 1700 kHz @ AM

PRE-SCALER=RF + (-8) kHz @ FM @

BW 4 kHz

AM STATION BANDWIDTH = 15 kHz

AM AUDIO CARRIER = AM STEREO  
(isb-fc) @ BW 10 kHz

AM VIDEO CARRIER = NBFM @ BW

4 kHz

COLOR SSTV MODE = FAST FM

O = RED LED

AM STEREO

O = GREEN LED



COLOR SSTV

RADIOVISION FM VIDEO AM STEREO RECEIVER (SSTV)..

KEITH JONES (JABARI) USPTO / PAIRS APP# 10/823912.

FIG 9

**Drawing 4/30/08**

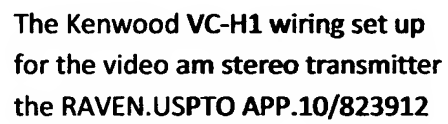

**Fig 10**